


Aluminium Connectors - With Centre Oil Stop Barrier

Same Cables on either sides for Heavy Duty (HT-33KV) Short Barrel

- Electrolytic High Conductivity Aluminium
- Electro Tinned Plated
- Barrel Prefilled with oxide inhibiting compound & capped at end.

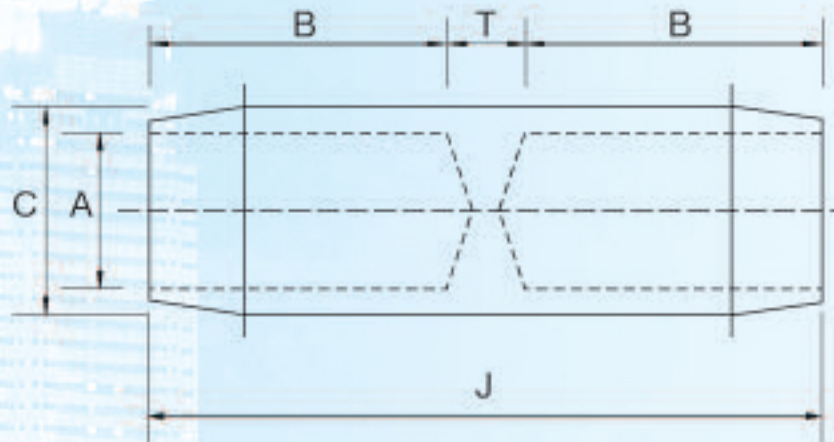

Cable Size mm ²	Dimensions					IDEAL CAT NO.
	A	C	B	J	T	
95	12.0	16.9	34	72	4	IDTFX 95
120	13.7	19.0	37	80	6	IDTFX 120
150	15.1	21.1	38	82	6	IDTFX 150
185	16.6	23.9	43	92	6	IDTFX 185
225	18.6	26.1	50	106	6	IDTFX 225
240	19.3	27.2	52	110	6	IDTFX 240
300	21.8	30.2	60	126	6	IDTFX 300
400	25.8	34.8	70	146	6	IDTFX 400
500	28.2	39.1	75	158	8	IDTFX 500
630	31.7	44.4	84	176	8	IDTFX 630
800	35.7	49.5	98	204	8	IDTFX 800
1000	41.0	56.0	108	224	8	IDTFX 1000