


Aluminium Ferrules

For Crimping to HT Alum. XPLE Cables

- Electrolytic High Conductivity Aluminium
- Electro Tinned Plated
- Barrel Prefilled with oxide inhibiting compound & capped at end.

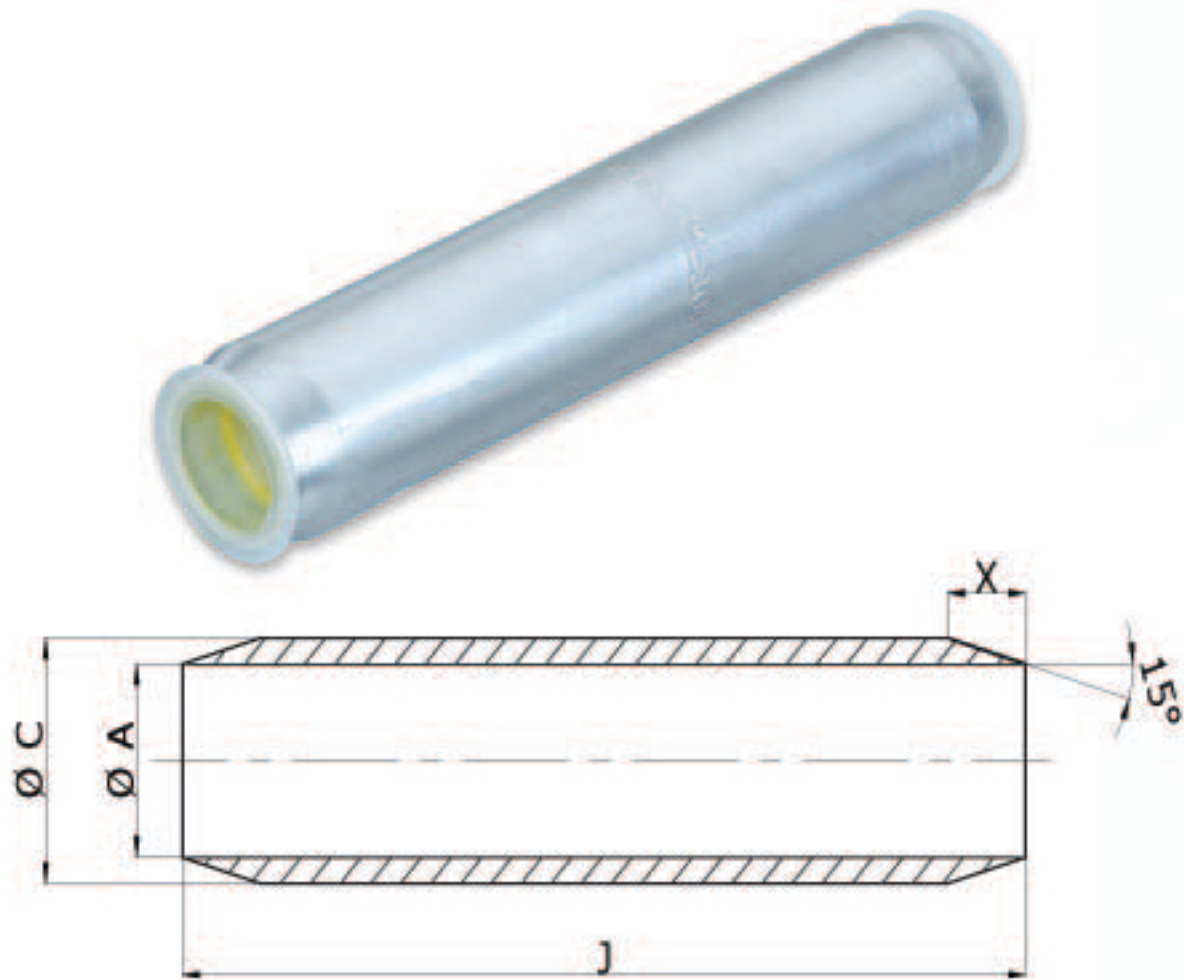

Cable Size mm ²	Dimensions			IDEAL CAT NO.
	A	C	J	
16	5.0	8.3	60	IDXF-16-60
25	7.2	9.6	82	IDXF-25-82
35	8.3	11.1	90	IDXF-35-90
50	10.1	13.5	100	IDXF-50-100
70	10.2	14.5	104	IDXF-70-104
95	12.0	16.9	108	IDXF-95-108
120	13.7	19.0	112	IDXF-120-112
150	15.1	21.1	116	IDXF-150-116
185	16.6	23.9	128	IDXF-185-128
225	18.6	26.1	136	IDXF-225-136
240	19.3	27.2	140	IDXF-240-140
300	21.8	30.2	150	IDXF-300-150
400	25.0	34.8	150	IDXF-400-150
500	28.2	39.1	175	IDXF-500-175
630	31.7	44.4	200	IDXF-630-200
800	35.7	49.5	225	IDXF-800-225
1000	41.0	56.0	250	IDXF-1000-250